




R.O. (Inches)	14 5/8	16 1/2	20 1/2	24 3/8	30 1/4	32 1/4	36 1/4
R.O. (mm)	370	420	520	620	770	820	920
O.S.M. (mm)	350	400	500	600	750	800	900
20 1/2	520	500	✓	✓	✓	✓	✓
32 1/4	820	800	✓	✓	✓	✓	✓
36 1/4	920	900	✓	✓	✓	✓	✓
40 1/8	1020	1000	✓	✓	✓	✓	✓
48	1220	1200	✓	✓	✓	✓	✓
59 7/8	1520	1500	N/A	✓	✓	✓	✓
71 5/8	1820	1800	N/A	N/A	✓	✓	✓

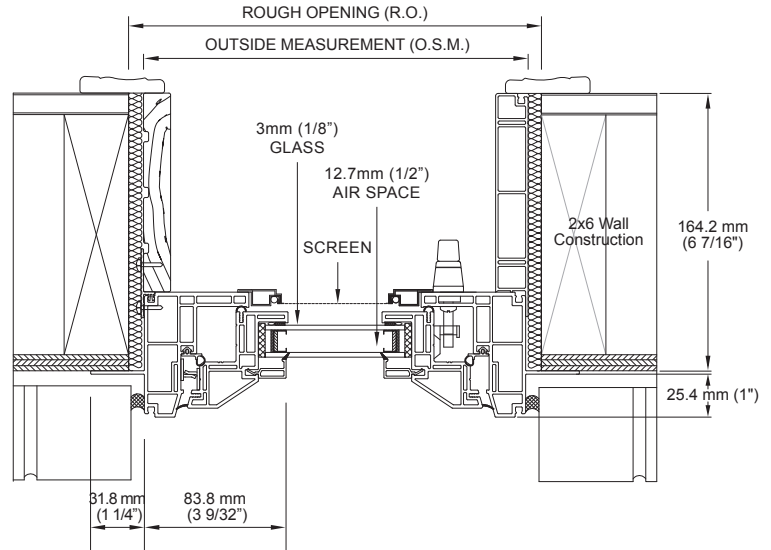


260 CASEMENT HORIZONTAL SECTION

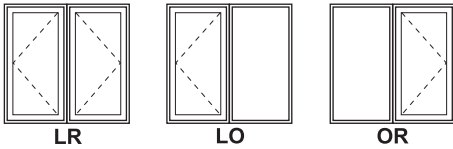

R.O. (Inches)	28 3/8	30 1/4	32 1/4	36 1/4	40 1/8	48	59 7/8	63 3/4	71 5/8
R.O. (mm)	720	770	820	920	1020	1220	1520	1620	1820
O.S.M. (mm)	700	750	800	900	1000	1200	1500	1600	1800
20 1/2	520	500	✓	✓	✓	✓	✓	✓	✓
32 1/4	820	800	✓	✓	✓	✓	✓	✓	✓
36 1/4	920	900	✓	✓	✓	✓	✓	✓	✓
40 1/8	1020	1000	✓	✓	✓	✓	✓	✓	✓
48	1220	1200	✓	✓	✓	✓	✓	✓	✓
59 7/8	1520	1500	N/A	✓	✓	✓	✓	✓	✓
71 5/8	1820	1800	N/A	N/A	✓	✓	✓	✓	✓

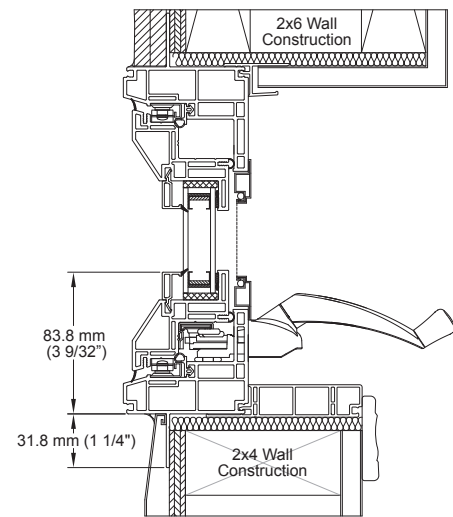

260 CASEMENT VERTICAL SECTION

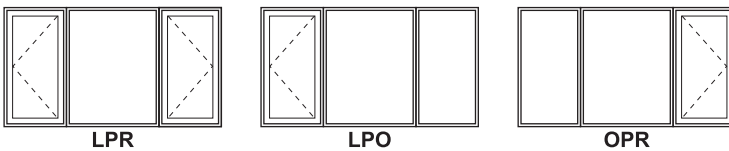

R.O. (Inches)	48	59 7/8	63 3/4	71 5/8	83 1/2	95 1/4	107 1/8	118 7/8
R.O. (mm)	1220	1520	1620	1820	2120	2420	2720	3020
O.S.M. (mm)	1200	1500	1600	1800	2100	2400	2700	3000
20 1/2	520	500	✓	✓	✓	✓	✓	✓
32 1/4	820	800	✓	✓	✓	✓	✓	✓
36 1/4	920	900	✓	✓	✓	✓	✓	✓
40 1/8	1020	1000	✓	✓	✓	✓	✓	✓
48	1220	1200	✓	✓	✓	✓	✓	✓
59 7/8	1520	1500	✓	✓	✓	✓	✓	✓
71 5/8	1820	1800	N/A	✓	✓	✓	✓	✓

O.S.M. = Outside measurement
R.O. = Rough opening

Order units as viewed from outside.
Custom sizes available.